




**1313EFR**

**Epoxy Case  
(Radial Leads)**

Lead Specs.  
Tinned Copperweld  
B through E cases: 22 AWG  
F through Q cases: 20 AWG

**Metallized  
Polyester  
Capacitors**

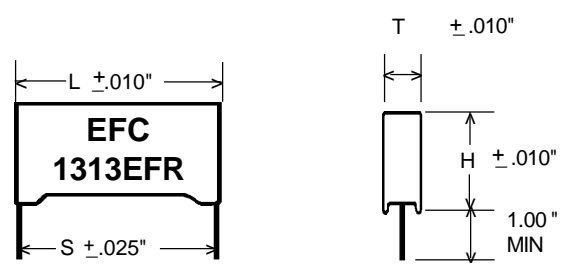

(All dimensions in inches)

**DIMENSIONS and RATINGS**

Cap. $\mu$ F	63/40 VDC/VAC	160/100 VDC/VAC	250/160 VDC/VAC	400/220 VDC/VAC	630/250 VDC/VAC	CASE SIZE	L mm in.	T mm in.	H mm in.	S mm in.
.001	B	B	B	B	C	B	10.5	4	9	7.5
.0012	B	B	B	B	C	B	.413	.157	.354	.295
.0015	B	B	B	B	C	C	13	4	9	10
.0018	B	B	B	B	C	C	.512	.157	.354	.394
.0022	B	B	B	B	C	C	13	5	11	10
.0027	B	B	B	B	C	C	.512	.197	.433	.394
.0033	B	B	B	B	C	E	13	6	12	10
.0039	B	B	B	B	C	C	.512	.236	.472	.394
.0047	B	B	B	B	C	F	18	5	11	15
.0056	B	B	B	B	C	C	.709	.197	.433	.591
.0068	B	B	B	B	C	G	18	6	12	15
.0082	B	B	B	B	C	C	.709	.236	.472	.591
.01	B	B	B	B	C	H	18	7.5	13.5	15
.012	B	B	B	B	D	D	.709	.295	.531	.591
.015	B	B	B	C	D	J	26.5	6	15	20
.018	B	B	B	C	E	K	1.04	.236	.591	.787
.022	B	B	B	C	E	K	26.5	7	16	20
.027	B	B	B	C	F	L	1.04	.276	.630	.787
.033	B	B	B	D	F	L	26.5	6	15	22.5
.039	B	B	C	D	G	L	1.04	.236	.591	.886
.047	B	B	C	D	G	M	26.5	7	16	22.5
.056	B	B	C	E	H	M	1.04	.276	.630	.886
.068	B	B	C	E	H	N	26.5	8.5	16.3	22.5
.082	B	B	D	F	H	N	1.04	.335	.642	.886
.1	B	C	D	F	J/L	O	26.5	10	19	22.5
.12	B	C	D	G	J/L	O	1.04	.394	.748	.886
.15	B	C	E	H	J/L	P	32	11	20	27.5
.18	C	D	E	H	K/M	P	1.26	.433	.787	1.08
.22	C	D	F	J/L	N	Q	32	13	22	27.5
.27	C	D	F	J/L	O	Q	1.26	.512	.866	1.08
.33	C	E	G	K/M	P					
.39	D	E	G	K/M	P					
.47	D	F	H	N	Q					
.56	E	G	H	O	Q					
.68	E	G	J/L	O	Q					
.82	F	H	K/M	P						
1.0	F	H	N	P						
1.2	G	H	N	Q						
1.5	G	K/M	P							
2.2	H	N	P							
3.3	K/M	O	Q							
4.7	N	P								
6.8	O									
10.0										

**ELECTRONIC FILM CAPACITORS, INC.**

Reidville Industrial Park \* 41 Interstate Lane \* WATERBURY, CONNECTICUT 06705  
Phone (203) 755-5629 FAX (203) 755-0659

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.