




Your Complete Source for Film Capacitors

41 Interstate Lane
Waterbury, CT 06705 USA
P: 203.755.5629
www.filmcapacitors.com
sales@filmcapacitors.com

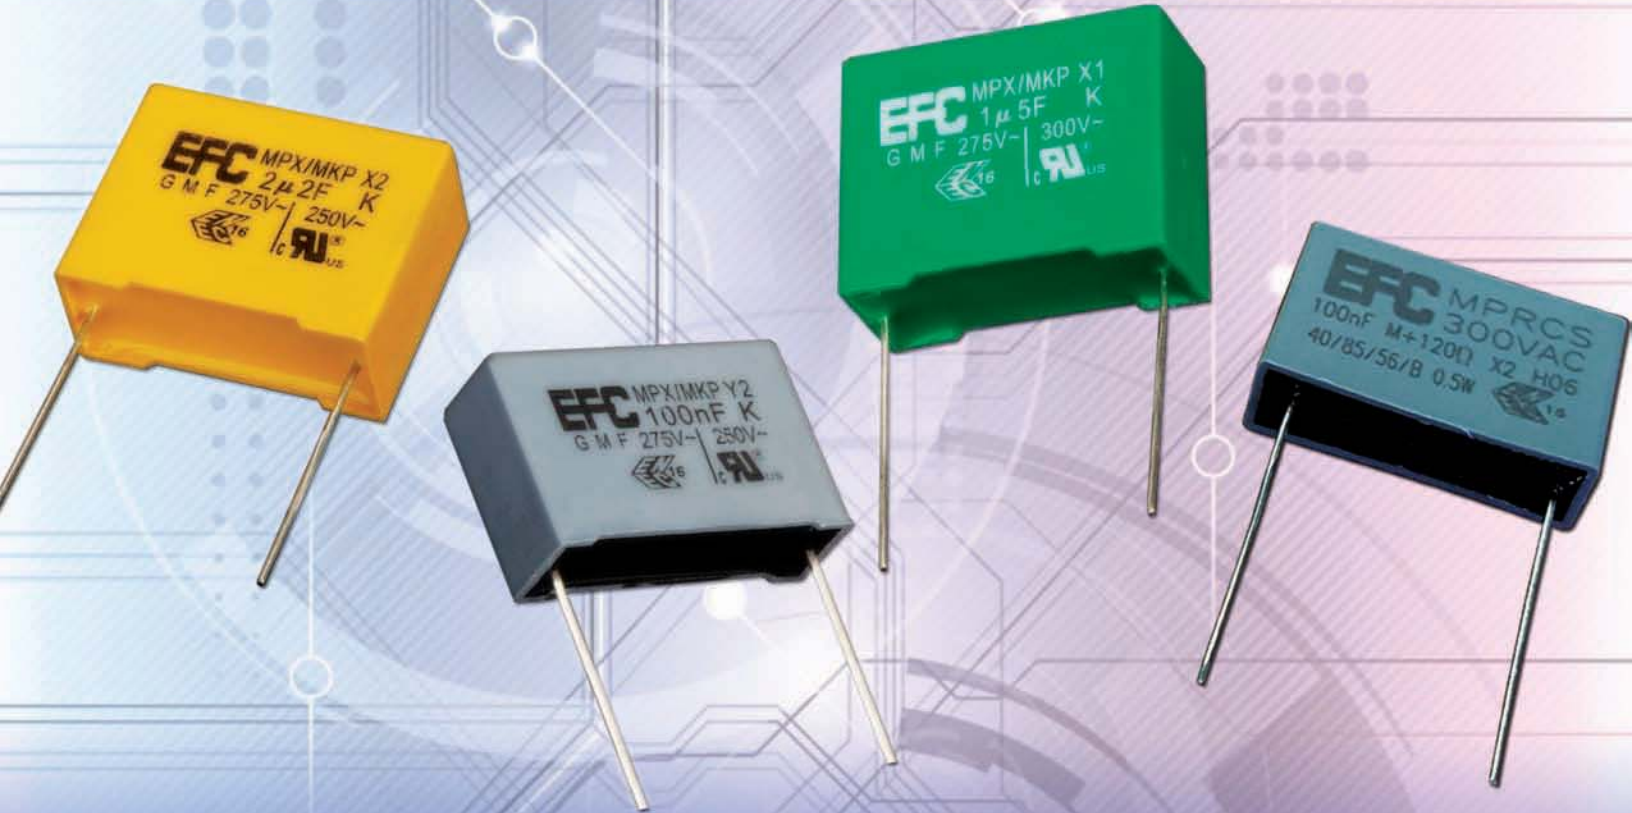

Series “MKP”: EMI Suppression Capacitors Metallized Polypropylene Dielectric

Features:

Non-inductive construction using Metallized Polypropylene dielectric packaged in a UL94V-0 plastic case and epoxy resin.

Voltage:

250 VAC to 440 VAC.

Capacitance Range:

.001 μ F to 10 μ F.

Temperature Range:

-40°C to 100°C.

Application:

EMI suppression, Home appliances, Lighting, Audio and TV circuits, Antenna coupling, Across the line.

Packaging:

Radial lead box.